

turning your world

TOPPY

V S H A P E

V S H A P E L O G Y

M A S T E R I N V E R T E R

F O U R F I N G E R S

I N V E R T E R

P A L L E T - M A T I C

**P A L L E T
C H A N G I N G &
H A N D L I N G
S Y S T E M S**



PALLET CHANGING & HANDLING SYSTEMS



TOPPY V SHAPE 95°/120° (Push Button / PLC / Logistic System)

TOPPY V SHAPE is a pallet exchanger built with a unique, strong **V SHAPE** frame. Manufactured in painted steel with a full stainless steel model also available.

All moving parts are operated by hydraulic and electrical systems.

The pallet to be replaced is loaded onto a lower platform at floor level by either an electric pallet jack or forklift.

At the start of cycle, a pallet latch secures the pallet to the platform and the upper compactor plate moves down until a sensor detects the top of the load. In this position the plate provides a gentle support to the load.

The load, secured by the **V SHAPE** frame, is then lifted and rotated backwards. When the load is in the tilted position the lower platform moves back to the floor and the pallet is released. The operator can quickly and easily replace the pallet at floor level.

With the new pallet, the load is returned to floor level and removed.


The complete operation takes approximately 1 minute and 45 seconds.

TOPPY V SHAPE will handle various types of loads including boxes, bags, vials, drums, bottles and other types of products depending on the amount of backward tilting: 90°, 95° and 120°.

TOPPY V SHAPE 95° and **120°** can become part of a logistic system with conveyors and automatic pallet stackers. These systems allow for non-stop working cycles of up to 45 pallets per hour and 24/7 operation.

SPECIAL MODEL AVAILABLE

TOPPY
turning your world

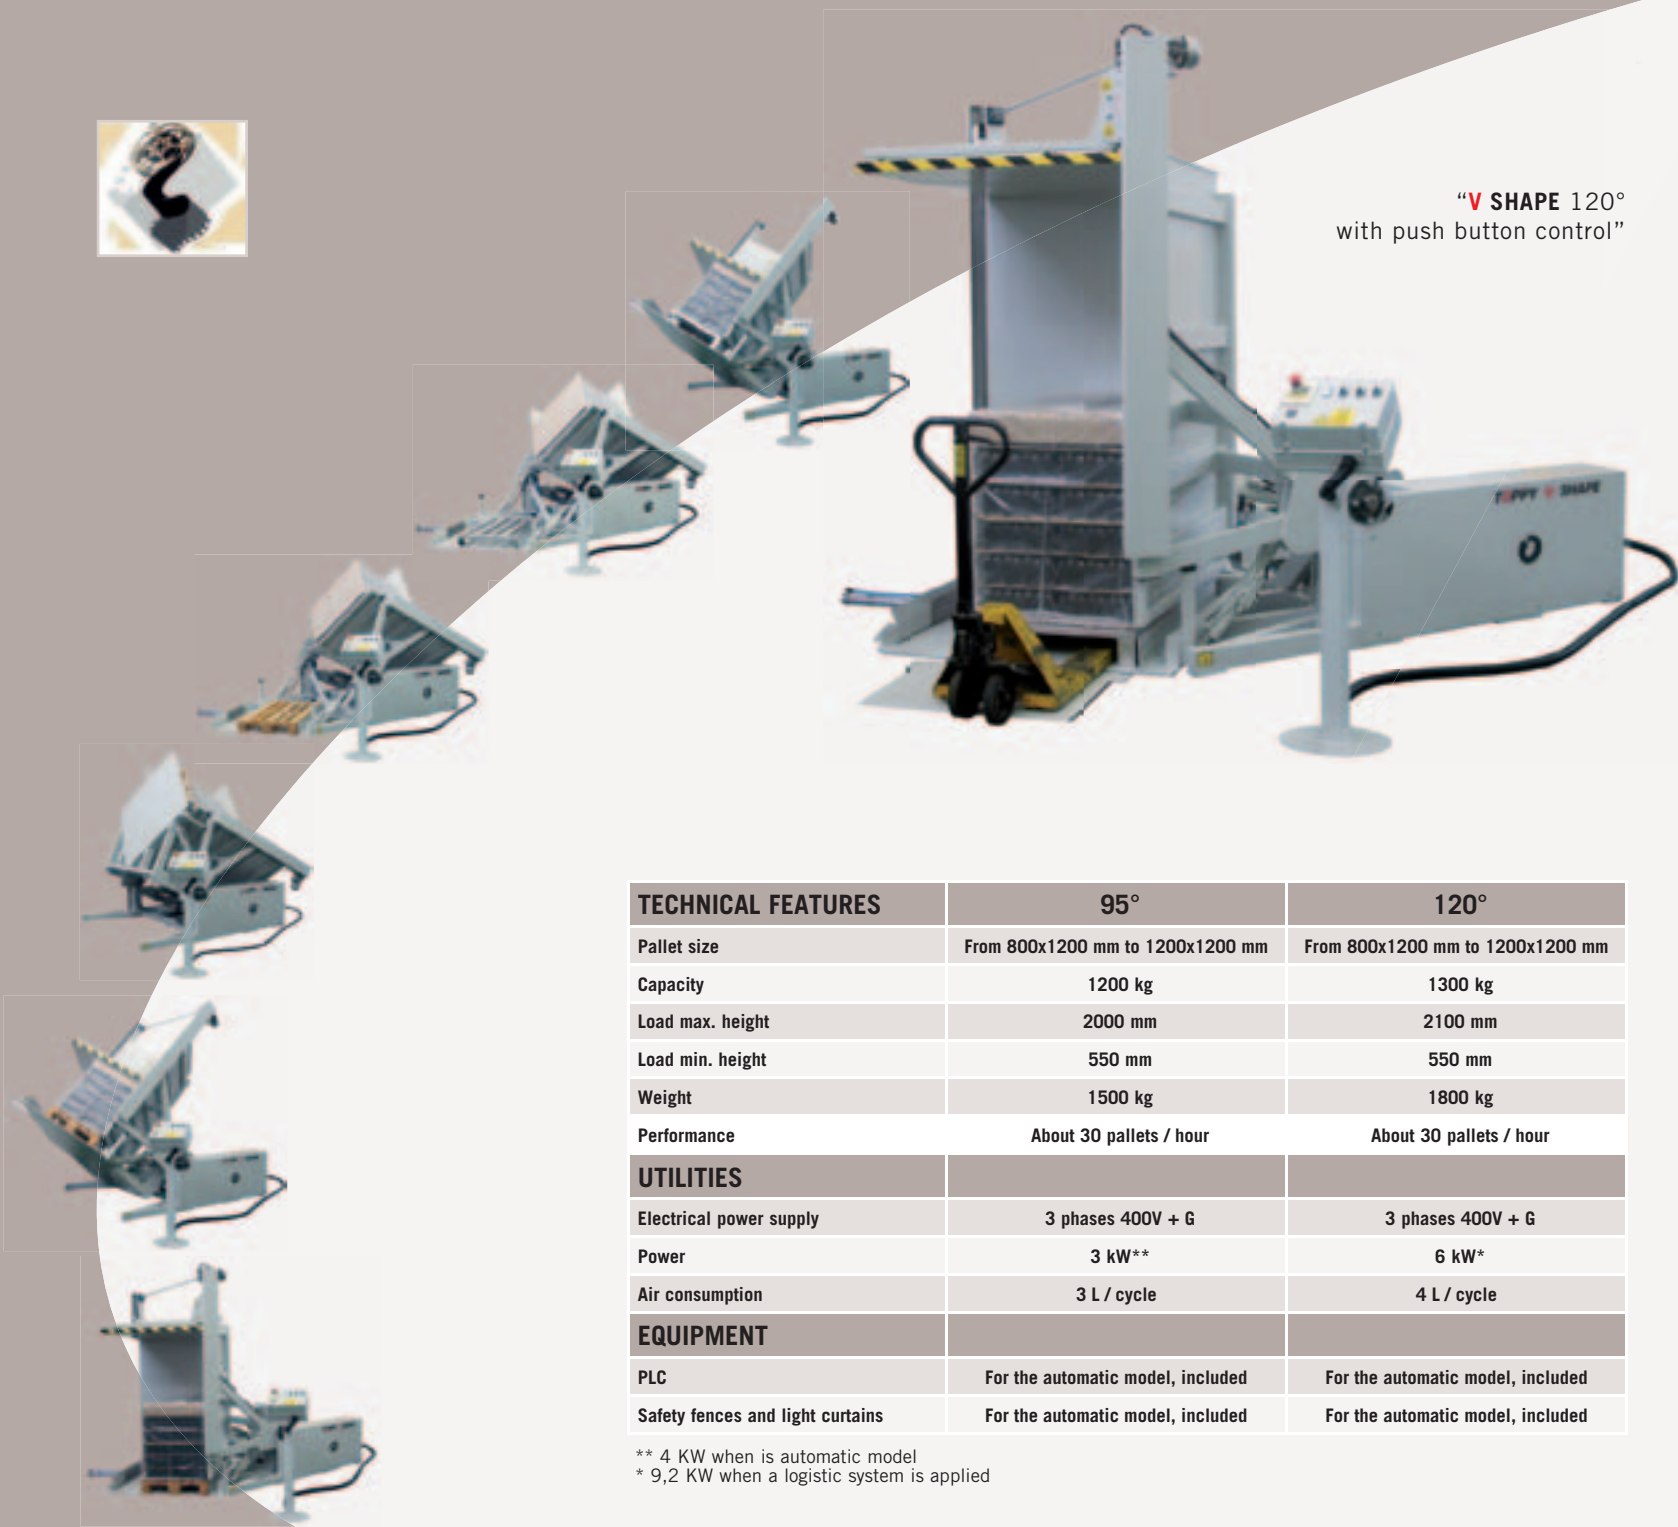


“V SHAPE 120°
with push button control”

TECHNICAL FEATURES	95°	120°
Pallet size	From 800x1200 mm to 1200x1200 mm	From 800x1200 mm to 1200x1200 mm
Capacity	1200 kg	1300 kg
Load max. height	2000 mm	2100 mm
Load min. height	550 mm	550 mm
Weight	1500 kg	1800 kg
Performance	About 30 pallets / hour	About 30 pallets / hour
UTILITIES		
Electrical power supply	3 phases 400V + G	3 phases 400V + G
Power	3 kW**	6 kW*
Air consumption	3 L / cycle	4 L / cycle
EQUIPMENT		
PLC	For the automatic model, included	For the automatic model, included
Safety fences and light curtains	For the automatic model, included	For the automatic model, included

** 4 KW when is automatic model

* 9,2 KW when a logistic system is applied

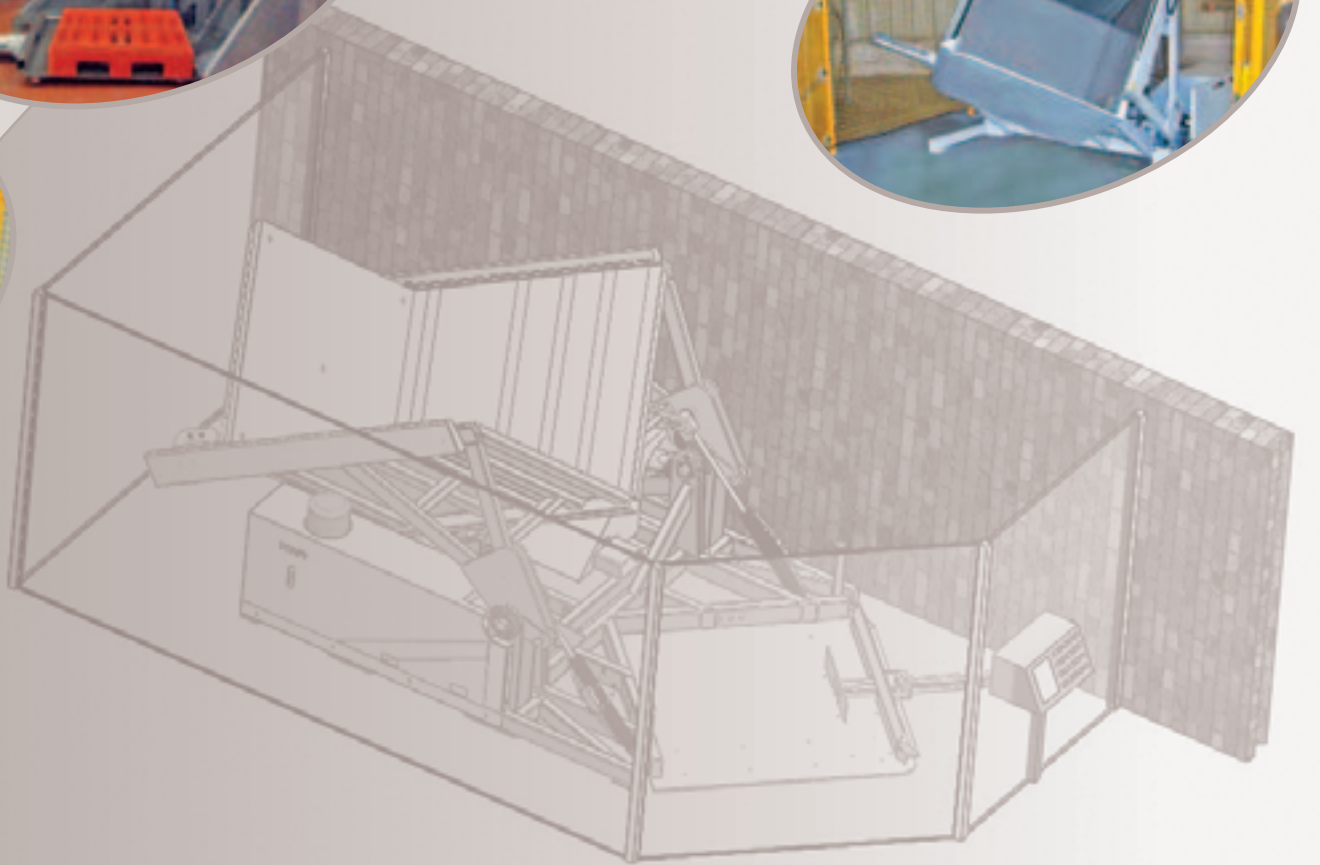

PALLET CHANGING & HANDLING SYSTEMS

TOPY MASTER INVERTER “pusher system”

TOPY MASTER INVERTER is a pallet exchanger. This unit transfers the load from one type of pallet to another without inverting or turning.

The pallet is exchanged through a two-way translation movement by using the combined forces of the side press and back pushed.

The pallet with the load is placed onto a conveyor and directed to a system chamber. A new pallet is dispensed onto the conveyor and placed in front of it. Two rubber side plates close and support the load on two sides. The side plates gently apply pressure to the material and together with a back plate, slide it onto the new pallet. The load then continues through the conveyor ready to be removed.

The load can be placed in the **TOPY** MASTER INVERTER or removed by electric pallet jack, forklift or conveyor.

TOPY MASTER INVERTER can be integrated with logistics systems, conveyors and an automatic pallet stacker for continuous working cycles of up to 40 pallets per hour.

TECHNICAL FEATURES

Pallet size	From 800 x 1200 to 1000 x 1200 mm
Capacity	1000 kg
Load max height	1700 mm pallet included (also special heights on request)
Load min height	not relevant
Weight	1500 kg
Performance	About max 40 pallets / hour

UTILITIES

Electric power supply	3 phases 400V + G
Power	5 kW
Air consumption	10 L / cycle




EQUIPMENT

PLC	For the automatic model, included
Safety fences and light curtains	For the automatic model, included








PALLET CHANGING & HANDLING SYSTEMS

TOPPY
MASTER INVERTER
Logistic system

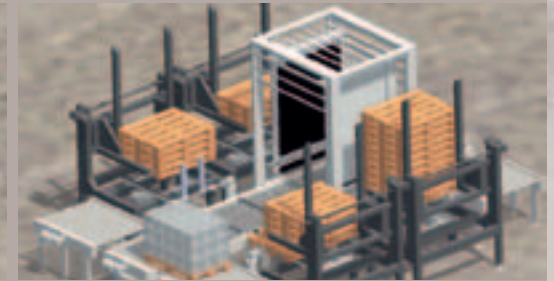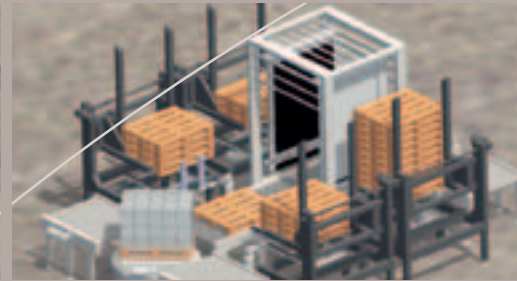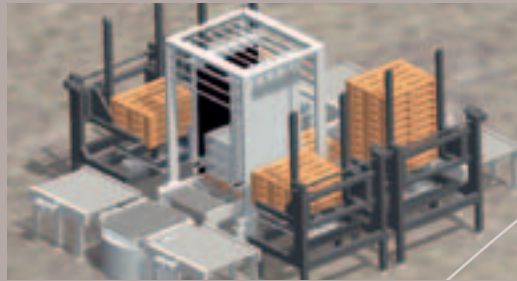

TOPPY
FOUR FINGERS
Logistic system

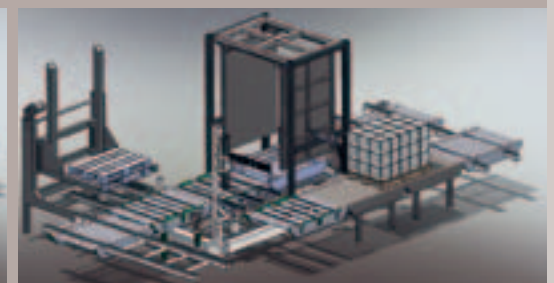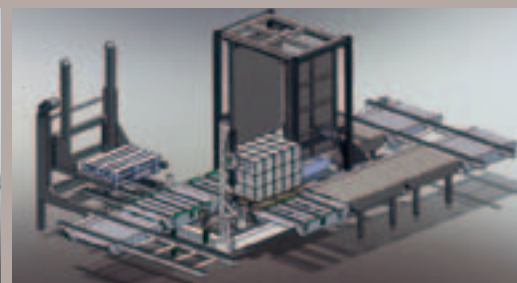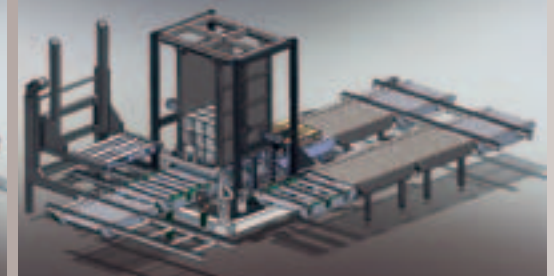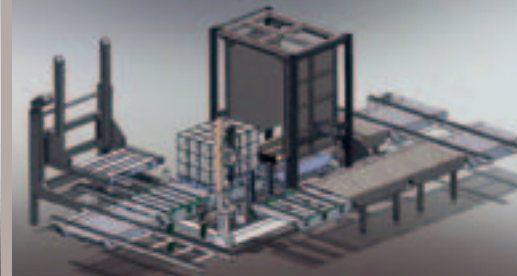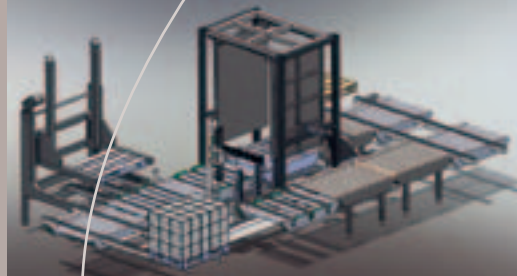

PALLET CHANGING & HANDLING SYSTEMS

TOPY FOUR FINGERS

TOPY FOUR FINGERS is designed and built to exchange fully loaded pallets without inverting or turning the loads.

This system will work with EPAL pallets (800 x 1200 mm) or industrial pallets (1000 x 1200 mm). The pallets used for this system are required to meet all EC rules and regulations.

The palletized load is placed onto the lift platform from the side either through a conveyor system or forklift. Once the pallet is placed onto the platform, four forks (fingers) are inserted automatically through the open slots of the pallet under the material load. Two rubber side plates gently close to help stabilize the load and reduce the weight the forks need to support. The pressure of the plates adjusts automatically and does not damage the load.

The pallet is lowered allowing the forks and plates to support the load. Either using a forklift or a conveyor system, the pallet is removed and replaced. The new pallet on the lift platform is then introduced under the load and the forks are removed.

TECHNICAL FEATURES

FOUR FINGERS





Pallet size	From 800 x 1200 mm to 1000 x 1200 mm
Capacity	1200 kg
Load max height	2500 mm pallet included
Load min height	not relevant
Weight	2000 kg
Performance	About 100 pallets / hour (integrated logistic system)

UTILITIES


Electrical power supply	3 phases +N +G
Power	10 kW
Air consumption	10 L / cycle

EQUIPMENT

PLC	Included
Safety fences and light curtains	Included

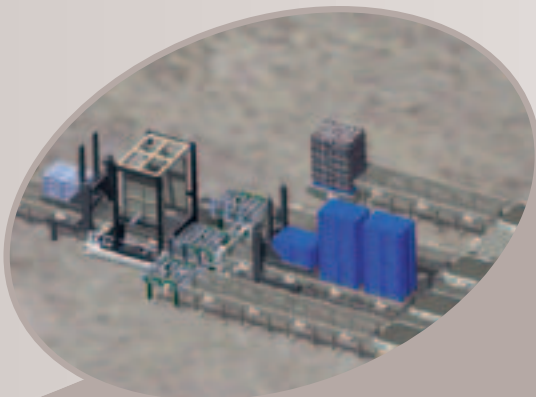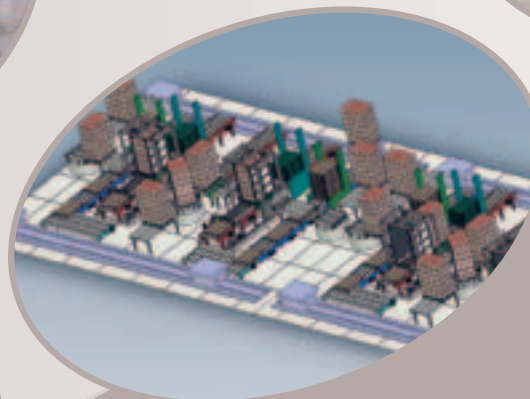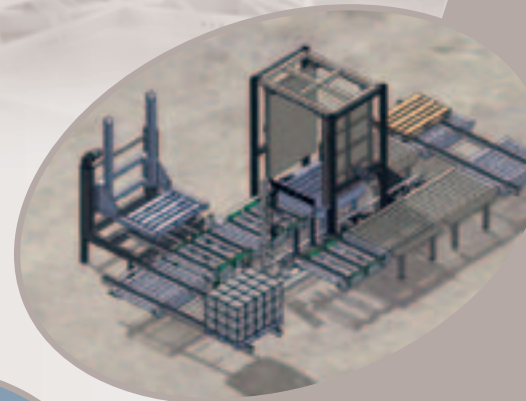

“TOPPY INVERTER
with push button control”

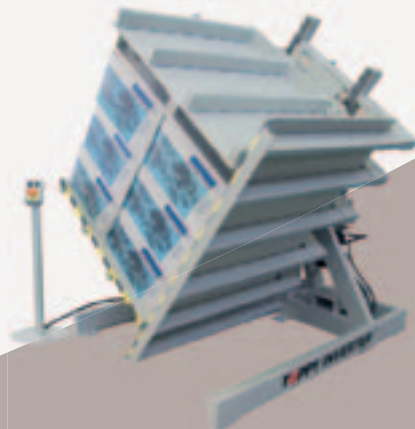

PALLET CHANGING & HANDLING SYSTEMS

TOPY INVERTER

TOPY INVERTER is a stationary pallet inverter that will turn loads and exchange pallets on loads of a maximum weight of 1500 kg and maximum height of 2000 mm. The Pallets are loaded and unloaded using a forklift.

The pallet turning is accomplished with:




- 90° rotation without pressure for steady loads (i.e. boxes).
- 180° rotation without pressure for unsteady and fragile loads (i.e. cruetts and bottles).
- 180° rotation with pressure for unsteady but not fragile loads (i.e. bags, larger size bags and drums).

TOPY INVERTER is also available with a PLC control (fully automatic), and as a floor level version that can be loaded and unload using an electric pallet jack.

SPECIAL MODEL AVAILABLE

TECHNICAL FEATURES	INVERTER SILVER	INVERTER
Capacity	1250 kg	1500 kg
Max. opening	1680 mm	2000 mm
Min. opening	550 mm	650 mm
Platform size	1220x1020 mm	1220x1020 mm
Power	3 kW	6 kW
Rotation	Hydraulic	Hydraulic
Control	Push button panel or PLC	Push button panel or PLC
Turning time	About 20 seconds	About 26 seconds
Performance	About 22 pallets / hour	About 20 pallets / hour
Electrical power supply	3 phases 400V + G, 3 kW	3 phases 400 V + G, 6 kW
Safety fences and light curtains	For the automatic model, included	For the automatic model, included


PALLET CHANGING & HANDLING SYSTEMS

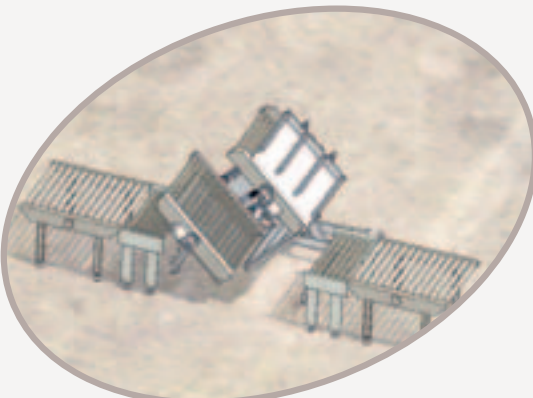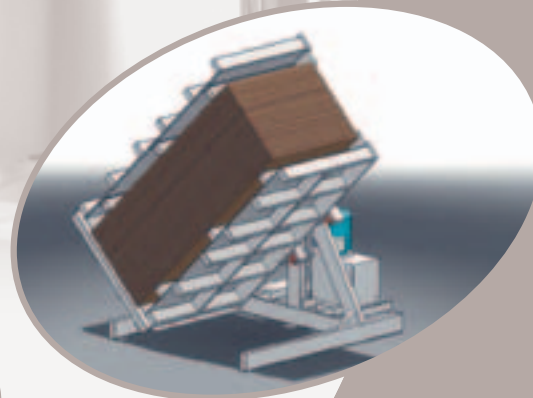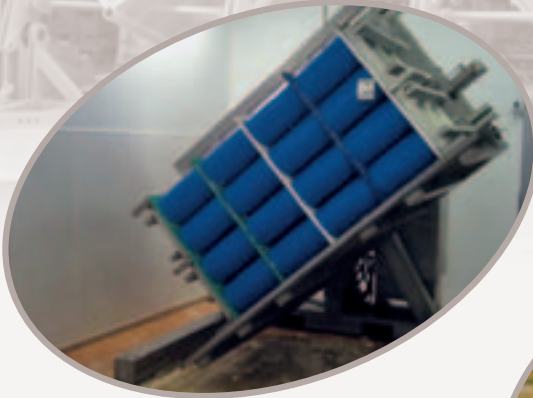

MOBILE PALLET CHANGER

TOPY ADVANCE PHARMA



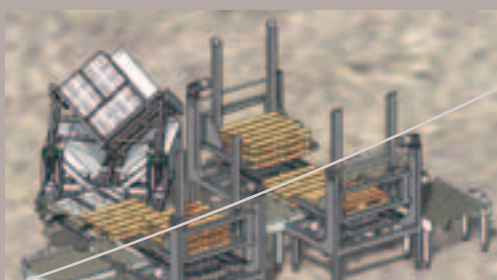

Automatic pallet dispenser
PALLET-MATIC



PALLET-MATIC	
Pallet size	1200 x 800 x 150 mm (euro)
Lifting capacity	400 kg, max. 15 pallets
Air pressure required	Min. 6 bar - max. 9 bar
Electrical power supply	220V, 50Hz - 0,25 kW
Air consumption	15 L / cycle
Control	PLC touch screen choice manual/automatic choice stack / destack
Material	Steelplate thickness 4 mm. Powder coated
RAL	7035

turning your world

TOPPY

Established in Bologna on 1978, **TOPPY** S.r.l. began as a producer of machines and trucks for the graphic industry. Since then, whenever a good application was found, other machines were added to the **TOPPY** range, significantly in the pharmaceutical, food, cosmetic and ceramic fields. Constant growth in technology and output has enabled **TOPPY** to consolidate its position amongst the Italian leaders in the materials handling sector. The **TOPPY** range has been continuously extended and upgraded to satisfy the market and the users' varied needs.

TOPPY can supply pallet turning and pallet changing machines, both mobile and stationary, also pallet trucks, reel lifting machines and logistic systems. The **TOPPY** becomes indispensable everywhere the load to handle is placed on a pallet.



VIDEO AVAILABLE

TOPPY is continually updating their products according to market needs.

The technical specifications given here are therefore subject to change without prior notice or liability.

TOPPY srl - Via Muzza Spadetta, 18
40053 Bazzano (BO) Italy
Tel +39 051 833701 - Fax +39 051 834097
info@toppy.it - www.topy.it

